

Design Method of Digitally Fabricated Spring Glass Pen

Kohei Ogawa*
University of Tsukuba
ruscello1023.kt@gmail.com

Kengo Tanaka*
University of Tsukuba
kengodivgrad@gmail.com

Tatsuya Minagawa
University of Tsukuba
cha84rakanal@gmail.com

Yoichi Ochiai
University of Tsukuba
Pixie Dust Technologies,
Inc.
wizard@slis.tsukuba.ac.jp

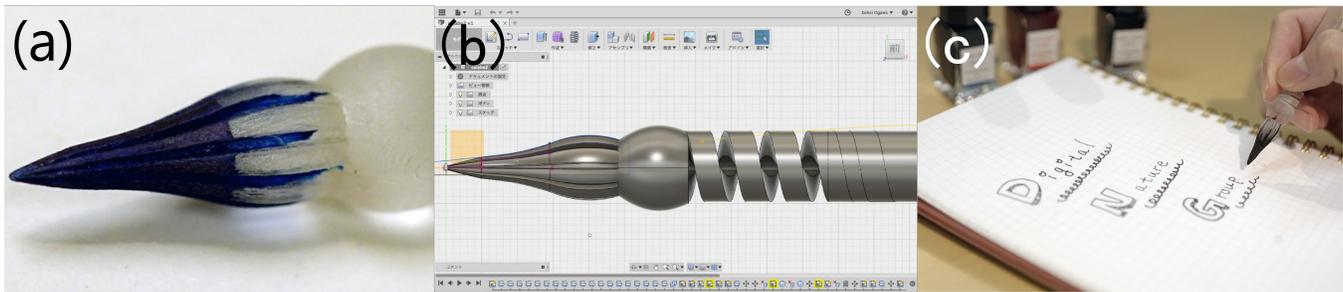


Figure 1: (a) Structure of the pen tip where the capillary phenomenon occurs. (b) This is modeled using 3DCAD software. (c) This figure shows that it is actually written with a pen printed with a 3D printer.

CCS CONCEPTS

• Human-centered computing → Haptic devices;

KEYWORDS

interaction, digital fabrication, pen, structure, haptic

ACM Reference format:

Kohei Ogawa*, Kengo Tanaka*, Tatsuya Minagawa, and Yoichi Ochiai. 2018. Design Method of Digitally Fabricated Spring Glass Pen. In *Proceedings of SIGGRAPH '18 Posters, Vancouver, BC, Canada, August 12-16, 2018*, 2 pages. <https://doi.org/10.1145/3230744.3230809>

1 INTRODUCTION

In this study, We propose a method to develop a spring glass dip pen by using a 3D printer and reproduce different types of writing feeling. There have been several studies on different types of pens to change the feel of writing. For example, EV-Pen [Wang et al. 2016] and haptics pens [Lee et al. 2004] changes the feel of pen writing with using vibration. However, our proposed method does not reproduce tactile sensation of softness by using vibrations.

A pen is a part of our everyday life. Considering that there are so many types of pens available, there is a need to produce a pen suitable for individuals. A glass dip pen requires technology for its

* Two joint first authorship.

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).

SIGGRAPH '18 Posters, August 12-16, 2018, Vancouver, BC, Canada

© 2018 Copyright held by the owner/author(s).

ACM ISBN 978-1-4503-5817-0/18/08.

<https://doi.org/10.1145/3230744.3230809>



Figure 2: Development of three types of pens using 3D printers. (a) Glass dip pen. (b) Our proposed pen. (c) Spring pen.

development. Glass dip pens, which were first developed in Japan, use the capillary phenomenon and require glass artisan skills for their development. Therefore, we developed our spring glass dip pen by imitating a glass dip pen using a 3D printer (Fig. 2(a)). Moreover, we reproduced a new feel of writing and softness by applying the structure of a spring pen in our design method [Tanaka et al. 2017], which could not be reproduced using a general glass dip pen (Fig. 2(b)).

Recently, stylus pens, which are used as digital terminals, have become popular. Generally, a commercially available stylus pen can only produce the feel of a hard touch when it touches the tablet screen. Therefore, we developed a soft touch pen, similar to a brush, with a spring pen's structure using a 3D printer (Fig. 2(c)). The pen has many writing tastes, and there are various preferences depending on people.

Therefore, in this study, we propose a method of freely adjusting the softness of a pen and developing a user-desired pen.

2 IMPLEMENTATION

Our pen is developed using a 3D printer. The pen's 3D data is designed using the Fusion 360 software (Fig. 1(b)). The skills of craftsmen are necessary to develop a glass dip pen; however, it can be easily developed by digital fabrication. The capillary phenomenon is produced by creating fine gaps at the pen tip. Further, ink can be transmitted from the gap of a fine pen tip, which holds a certain amount of ink, for writing on paper (Fig. 1(a)). Spring-Pen [Tanaka et al. 2017] based on the structure of the spring, between the pen tip and the handle part of the glass dip pen, cannot be reproduced with ordinary glass; thus, we developed a soft glass dip pen to produce a new writing feel.



Figure 3: Stylus pen developed by us.

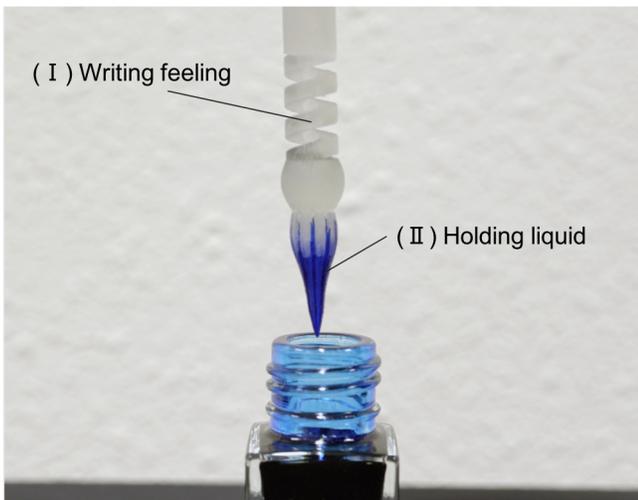


Figure 4: Spring Glass Pen - our proposed structure.

In addition, the stylus pen shown in Fig. 1(a) was created based on the structure of Spring-Pen as well. By using a stereolithographic

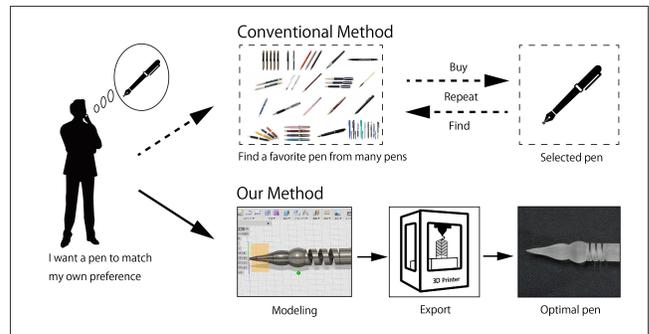


Figure 5: Our system workflow.

3D printer with superior lamination accuracy than a thermoforming 3D printer, we realized a pen size as small as that of a commercially available stylus pen with a thinner pen diameter (Fig. 3). Further, by applying conductive powder UBS of approximately 0010 L Ag, we made it applicable to tablets.

We can adjust the softness of our pen by changing its parameters, such as coil cross section and number of turns of the spring (Fig. 4(I)). In addition, we can adjust the ink holding capacity by changing the width of the groove of the pen tip (Fig. 4(II)). In this way, our pen can be developed by combining simple structures. Therefore, anyone can easily produce a pen that suits their preferences by using the digital fabrication method (Fig. 5).

REFERENCES

Johnny C. Lee, Paul H. Dietz, Darren Leigh, William S. Yerazunis, and Scott E. Hudson. 2004. Haptic Pen: A Tactile Feedback Stylus for Touch Screens. In *Proceedings of the 17th Annual ACM Symposium on User Interface Software and Technology (UIST '04)*. ACM, New York, NY, USA, 291–294. <https://doi.org/10.1145/1029632.1029682>

Kengo Tanaka, Taisuke Ohshima, and Yoichi Ochiai. 2017. Spring-pen: Reproduction of Any Softness with the 3D Printed Spring. In *SIGGRAPH Asia 2017 Posters (SA '17)*. ACM, New York, NY, USA, Article 37, 2 pages. <https://doi.org/10.1145/3145690.3145732>

Qinglong Wang, Xiangshi Ren, and Xiaoying Sun. 2016. EV-pen: An Electro-vibration Haptic Feedback Pen for Touchscreens. In *SIGGRAPH ASIA 2016 Emerging Technologies (SA '16)*. ACM, New York, NY, USA, Article 8, 2 pages. <https://doi.org/10.1145/2988240.2988241>