

TeraFoil: Design and Rapid Fabrication Techniques for Binary Holographic Structures in the Terahertz Region

Kenta Yamamoto
University of Tsukuba
Tsukuba, Japan
kenta.yam@digitalnature.slis.tsukuba.ac.jp

Kosaku Namikawa
University of Tsukuba
Tsukuba, Japan

Yoichi Ochiai
University of Tsukuba,
R&D Center for Digital Nature
Pixie Dust Technologies, Inc.
Tsukuba, Japan
wizard@slis.tsukuba.ac.jp

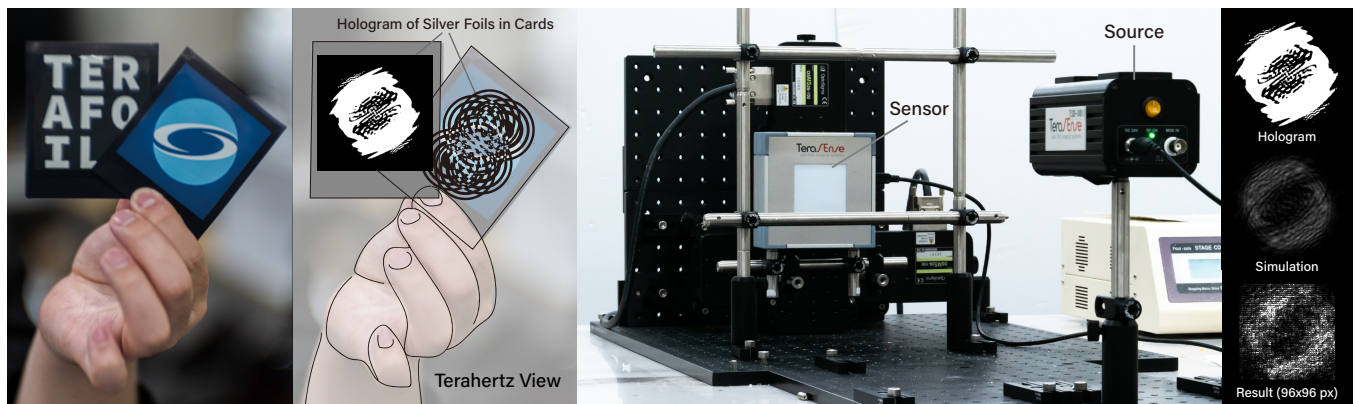


Figure 1: Left: holographic tag card of TeraFoil. Center: experimental setup with sub-terahertz detector array and sub-terahertz source. Right: hologram generated by the proposed method, simulated result, and captured result (SIGGRAPH logo).

ABSTRACT

In this paper, we introduce TeraFoil, a method for designing and fabricating material-based structures using binary holograms in the terahertz region. We outline the design, fabrication, imaging, and data processing steps for embedding information inside physical objects and exploring a method to create holographic structures with silver-foiled paper. This paper is a sheet on which silver foil is pasted where the ink is printed, using a home-use laser printer and an electric iron. Wave propagation calculations were performed to design a binary-amplitude hologram. Along with the designed pattern, we fabricated silver-foiled binary holograms in the sub-terahertz range (0.1 THz) and confirmed their functions using a two-dimensional THz sensor.

CCS CONCEPTS

• **Human-centered computing** → *User interface toolkits.*

KEYWORDS

digital fabrication, terahertz, hologram, data encoding, material

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).

SIGGRAPH '21 Posters, August 09-13, 2021, Virtual Event, USA

© 2021 Copyright held by the owner/author(s).

ACM ISBN 978-1-4503-8371-4/21/08.

<https://doi.org/10.1145/3450618.3469157>

ACM Reference Format:

Kenta Yamamoto, Kosaku Namikawa, and Yoichi Ochiai. 2021. TeraFoil: Design and Rapid Fabrication Techniques for Binary Holographic Structures in the Terahertz Region. In *Special Interest Group on Computer Graphics and Interactive Techniques Conference Posters (SIGGRAPH '21 Posters)*, August 09-13, 2021. ACM, New York, NY, USA, 2 pages. <https://doi.org/10.1145/3450618.3469157>

1 INTRODUCTION

The development of light sources in the electromagnetic frequency band of approximately 0.1–10 THz (wavelength of 3 mm–30 μm) has progressed [Lee 2009] and called "Terahertz" region. Electromagnetic waves of these frequencies can penetrate various materials such as paper, plastic, fibers, and semiconductors. The research for applications in the terahertz range is actively being conducted in several fields, such as PoS systems [Willis and Wilson 2013], foreign substance inspection [LEE et al. 2012], communication [Federici and Moeller 2010], medical sensing [Siegel 2004], and more. However, limited commercial applications exist for terahertz range waves [Banerjee et al. 2008]. Frameworks and design methods are required for identifying practical, everyday applications for computer human interactions.

To realize a simple pipeline in the terahertz region, we proposed TeraFoil—which helps create a material-like holographic structure by attaching a silver foil to paper—applying the technique of creating electronic circuits using silver foil [Segawa et al. 2019]. Using a home-use laser printer and an electric iron (as shown in



Figure 2: Left: designing an amplitude-modulated hologram. Center: fabrication flow. Right: results of our method (SIG letter).

Fig. 2), we achieved a faster and more economical method than that employed in a 3D printer. Wave propagation calculations were performed to design a binary amplitude hologram, and the designed hologram pattern was simulated. With the designed pattern, paper and silver foil were used to produce holographic structures, and their functions were confirmed with the experimental setup shown in Fig. 1.

2 PROPOSED METHOD AND RESULTS

Light wave propagation was calculated to design a binary amplitude hologram and simulate the reconstructed image from the hologram pattern, as shown in Fig. 2 (left). First, light wave back-propagates from the image plane $g_1(x_1, y_1)$ to the hologram plane $f_1(x_2, y_2)$ as follows:

$$f_1(x_2, y_2) = \mathcal{F}^{-1} \left[\mathcal{F}[g_1(x_1, y_1)] \mathcal{F} \left[\exp \left(\frac{i\pi p^2}{\lambda z} (x_1^2 + y_1^2) \right) \right] \right] \quad (1)$$

Next, a binary amplitude hologram $f_2(x_2, y_2)$ is calculated by binarizing the amplitude of the propagated plane:

$$f_2(x_2, y_2) = \text{binarize}(f_1(x_2, y_2)). \quad (2)$$

The propagation calculation is performed again using Eq. 1, and the reconstructed image $g_2(x_1, y_1)$ is derived to simulate the image reconstruction with the binary amplitude hologram.

A hologram structure is fabricated by thermo-compression bonding silver foil to paper on which the designed pattern is printed with ink, as shown in Fig. 2 (center). The fabricated hologram, the actual propagation result, and the simulation results are shown in Fig. 2 (right). The actual propagation result is captured by moving a two-dimensional THz sensor on the XZ stage, as shown in Fig. 1. Although the actual propagation result is noisy, the experimental results are in agreement with the simulation results.

3 CONCLUSION AND FUTURE WORK

This paper proposed a design and manufacturing method for TeraFolios. In this method, a structural design is obtained based on hologram calculation, and thermo-compression bonding of silver foil is used for the fabrication process. Because silver foil does not transmit terahertz waves, the hologram must be binarized. The

designed holographic structure was created, and the propagation result was confirmed using a two-dimensional THz sensor. Although there was noise in the image after propagation, we could obtain results similar to those of the simulation.

However, some improvements can be made in the future. First, the accuracy of the hologram should be improved via optimization. Second, concrete applications should be created using this method. We believe that such improvements can further contribute to TeraFolios as a rapid fabrication method for new holographic structures in the terahertz region.

ACKNOWLEDGMENTS

The authors would like to thank laboratory students (Keita Yamazaki, Tatsuya Minagawa, Masaaki Sadasue, Daichi Tagami, and Ippei Suzuki) for their valuable comments and their help with the experiment. This work was supported by JSPS KAKENHI Grant Numbers JP17H04688.

REFERENCES

- D. Banerjee, W. von Spiegel, M. D. Thomson, S. Schabel, and H. G. Roskos. 2008. Diagnosing water content in paper by terahertz radiation. *Opt. Express* 16, 12 (Jun 2008), 9060–9066. <https://doi.org/10.1364/OE.16.009060>
- John Federici and Lothar Moeller. 2010. Review of terahertz and subterahertz wireless communications. *Journal of Applied Physics* 107, 11 (2010), 111101. <https://doi.org/10.1063/1.3386413> arXiv:https://doi.org/10.1063/1.3386413
- YOUNG-KI LEE, SUNG-WOOK CHOI, SEONG-TAE HAN, DEOG HYUN WOO, and HYANG SOOK CHUN. 2012. Detection of Foreign Bodies in Foods Using Continuous Wave Terahertz Imaging. *Journal of Food Protection* 75, 1 (2012), 179–183. <https://doi.org/10.4315/0362-028X.JFP-11-181> arXiv:https://jfoodprotection.org/doi/pdf/10.4315/0362-028X.JFP-11-181
- Yun-Shik Lee. 2009. *Principles of Terahertz Science and Technology*. Springer US. – pages. <https://doi.org/10.1007/978-0-387-09540-0>
- Norihisa Segawa, Kunihiro Kato, and Hiroyuki Manabe. 2019. Rapid Prototyping of Paper Electronics Using a Metal Leaf and Laser Printer. In *The Adjunct Publication of the 32nd Annual ACM Symposium on User Interface Software and Technology* (New Orleans, LA, USA) (UIST '19). Association for Computing Machinery, New York, NY, USA, 99–101. <https://doi.org/10.1145/3332167.3356885>
- P. H. Siegel. 2004. Terahertz technology in biology and medicine. *IEEE Transactions on Microwave Theory and Techniques* 52, 10 (Oct 2004), 2438–2447. <https://doi.org/10.1109/TMTT.2004.835916>
- Karl D. D. Willis and Andrew D. Wilson. 2013. InfraStructs: Fabricating Information inside Physical Objects for Imaging in the Terahertz Region. *ACM Trans. Graph.* 32, 4, Article 138 (July 2013), 10 pages. <https://doi.org/10.1145/2461912.2461936>