


Organizer/Lecturer
Marc Pollefeys
Katholieke Universiteit
Leuven

I2

COURSE NOTES

Obtaining 3D Models
With a Hand-Held Camera

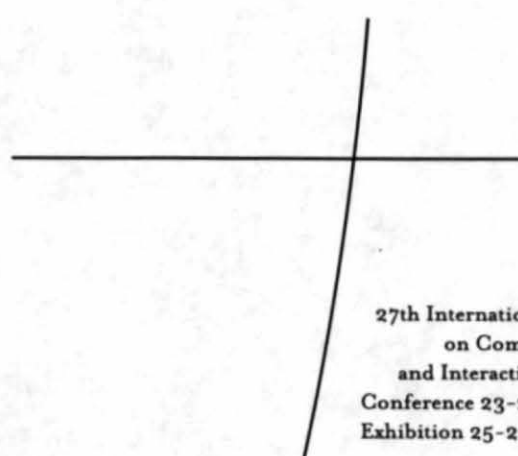

27th International Conference
on Computer Graphics
and Interactive Techniques
Conference 23-28 July 2000
Exhibition 25-27 July 2000

NEW ORLEANS

SIGGRAPH 2000

Contents

1	Introduction	1
1.1	3D from images	2
1.2	Overview	3
2	Projective geometry	9
2.1	Introduction	9
2.2	Projective geometry	9
2.2.1	The projective plane	10
2.2.2	Projective 3-space	10
2.2.3	Transformations	10
2.2.4	Conics and quadrics	11
2.3	The stratification of 3D geometry	13
2.3.1	Projective stratum	13
2.3.2	Affine stratum	14
2.3.3	Metric stratum	15
2.3.4	Euclidean stratum	18
2.3.5	Overview of the different strata	18
2.4	Conclusion	20
3	Camera model and multiple view geometry	21
3.1	Introduction	21
3.2	The camera model	21
3.2.1	A simple model	21
3.2.2	Intrinsic calibration	23
3.2.3	Camera motion	23
3.2.4	The projection matrix	24
3.2.5	Deviations from the camera model	25
3.3	Multi view geometry	27
3.3.1	Two view geometry	27
3.3.2	Three view geometry	29
3.3.3	Multi view geometry	31
3.4	Conclusion	31
4	Relating images	33
4.1	Feature point extraction	33
4.2	similarity measures	34
4.2.1	Intensity cross-correlation	34
4.2.2	Matching using affinely invariant regions	36
4.3	Two view geometry computation	37
4.3.1	Eight-point algorithm	37
4.3.2	Seven-point algorithm	37
4.3.3	More points...	38

4.3.4	Robust algorithm	38
4.3.5	Degenerate case	39
4.4	Three and four view geometry computation	40
5	Structure and motion	41
5.1	Initial frame	41
5.1.1	Initial projection matrices	41
5.1.2	Initial structure	42
5.2	Adding a view	42
5.2.1	projective pose estimation	42
5.2.2	Refining structure	43
5.2.3	Initialize new structure	44
5.3	Relating to other views	44
5.4	Refining structure and motion	46
5.4.1	Levenberg-Marquardt minimization	46
5.4.2	Bundle adjustment	47
5.5	Conclusion	49
6	Self-calibration	51
6.1	Calibration	51
6.1.1	Scene knowledge	52
6.1.2	Camera knowledge	52
6.2	Self-calibration	53
6.2.1	A counting argument	53
6.2.2	Geometric interpretation constraints	53
6.2.3	The image of the absolute conic	54
6.2.4	Self-calibration methods	55
6.2.5	Critical motion sequences	56
6.3	Flexible self-calibration	57
6.3.1	Linear approach	57
6.3.2	Non-linear approach	59
6.3.3	Maximum Likelihood approach	59
6.4	Conclusion	60
7	Dense depth estimation	61
7.1	Stereo matching	61
7.1.1	Exploiting scene constraints	61
7.1.2	Constrained matching	62
7.2	Image pair rectification	63
7.2.1	Planar rectification	65
7.2.2	Polar rectification	65
7.2.3	Examples	69
7.3	Multi-view stereo	70
7.3.1	Correspondence Linking Algorithm	70
7.3.2	Some results	73
7.4	Conclusion	75
8	Modeling	77
8.1	Surface model	77
8.1.1	Texture enhancement	77
8.2	Volumetric model	79
8.3	Plenoptic model	81
8.3.1	structure and motion	82
8.3.2	Plenoptic modeling and rendering	82

8.3.3	Experiments	85
8.3.4	conclusion	86
8.4	Augmented reality	86
8.4.1	Previous Work	88
8.4.2	Overview	88
8.4.3	Structure and motion	89
8.4.4	Augmented Video	89
8.4.5	Examples	90
8.4.6	Discussion	92
8.5	Conclusion	92
9	Some results	95
9.1	Introduction	95
9.2	Acquisition of 3D models from photographs	95
9.3	Acquisition of 3D models from pre-existing image sequences	101
9.4	Virtualizing archaeological sites	102
9.4.1	Virtualizing scenes	102
9.4.2	Reconstructing an overview model	103
9.4.3	Reconstructions at different scales	106
9.4.4	Combination with other models	106
9.5	More applications in archaeology	106
9.5.1	3D stratigraphy	107
9.5.2	Generating and testing building hypotheses	107
9.6	Applications in other areas	108
9.6.1	Architecture and heritage conservation	108
9.6.2	Mars rover control	109
9.6.3	Other applications	109
9.7	Conclusion	109