

Altered Touch: Miniature Haptic Display with Force, Thermal and Tactile Feedback for Augmented Haptics

Takaki Murakami

Keio University Graduate School of Media Design
murakami@kmd.keio.ac.jp

Charith Lasantha Fernando

Keio University Graduate School of Media Design
charith@kmd.keio.ac.jp

Tanner Person

Keio University Graduate School of Media Design
tannerperson@kmd.keio.ac.jp

Kouta Minamizawa

Keio University Graduate School of Media Design
kouta@kmd.keio.ac.jp



Figure 1: (a) Augmented Haptics Display, (b, c) Touching a haptic augmented clear cube, (d) Augmented thermal cues

ABSTRACT

In this paper, (1) we developed a fingertip haptic display with integrated force, tactile and thermal feedback in a miniature form-factor such that it can be worn easily and used with augmented reality applications without affecting the existing tracking technologies. (2) we propose the concept of "Altered Touch", where the integrated fingertip haptic display stated in (1) was used to alter the haptic properties of real objects by rendering projected visual and haptic feedback. The system consists of our own force display Gravity Grabber mechanism [Minamizawa et al. 2007] to render vertical, shearing forces, high frequency tactile vibrations, and a peltier module for thermal display. The integrated haptic display module weighs less than 50g, can be easily interfaced to a PC with just one micro USB cable, and works standalone from any other additional hardware. In this paper we use this wearable haptic actuator in several augmented reality applications to alter the softness/hardness and hot/cold sensation and several use cases have been discussed. Furthermore, the haptic display could be expanded to design a haptic glove that can interact with both virtual and augmented worlds.

CCS CONCEPTS

•Human-centered computing → Haptic devices;

KEYWORDS

Augmented Haptics, Force Sensation, Thermal Sensation, Tactile Sensation

ACM Reference format:

Takaki Murakami, Tanner Person, Charith Lasantha Fernando, and Kouta Minamizawa. 2017. Altered Touch: Miniature Haptic Display with Force, Thermal and Tactile Feedback for Augmented Haptics. In *Proceedings of SIGGRAPH '17 Emerging Technologies, Los Angeles, CA, USA, July 30 - August 03, 2017*, 2 pages.
DOI: <http://dx.doi.org/10.1145/3084822.3084836>

1 INTRODUCTION

Grounded and ungrounded integrated haptic displays have been used in many virtual reality applications. However, these devices [Fernando et al. 2012; Perez et al. 2016] are not suited for wearable augmented reality applications due to their complexity and bulky nature and thus mainly used in master-slave manipulation in robotics. Several augmented reality applications [Narumi et al. 2010] use pseudo haptic sensations, but they do not use active haptic rendering techniques.

In this paper first, we developed a fingertip haptic display with integrated force, tactile and thermal feedback in a miniature form-factor such that it can be worn easily and used with augmented reality applications without affecting the existing tracking technologies. As shown in Figure 1(a) the haptic display is very compact and could be connected to a PC with just a single micro USB connection. The integrated haptic display module weighs less than 50g and fits into average fingertip width of 20mm. Thus, wearing multiple displays in a single hand does not limit the finger movements and could use the existing gesture tracking APIs such as Leap Motion, Microsoft Kinect or HoloLens without having to rely on alternate methods of gesture tracking.

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).

SIGGRAPH '17 Emerging Technologies, Los Angeles, CA, USA

© 2017 Copyright held by the owner/author(s). 978-1-4503-5012-9/17/07...\$15.00
DOI: <http://dx.doi.org/10.1145/3084822.3084836>

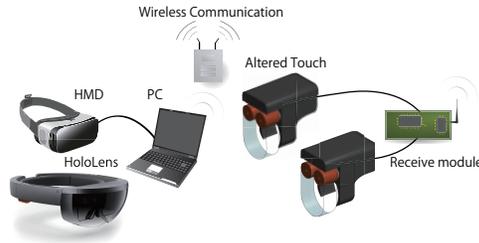


Figure 2: System Overview

Secondly, we propose the concept of "Altered Touch", where the integrated fingertip haptic display stated in (1) is used to alter the haptic properties of real objects by rendering projected visual and haptic feedback.

2 SYSTEM DESCRIPTION

As shown in Figure 2, the integrated haptic display module can be connected to a wearable PC with just a USB connection and embedded into wearables. The system was built on top of the Unity Game Engine so that it could be used with virtual reality headsets such as Oculus CV1 or Optical See Thru HMD's such as HoloLens.

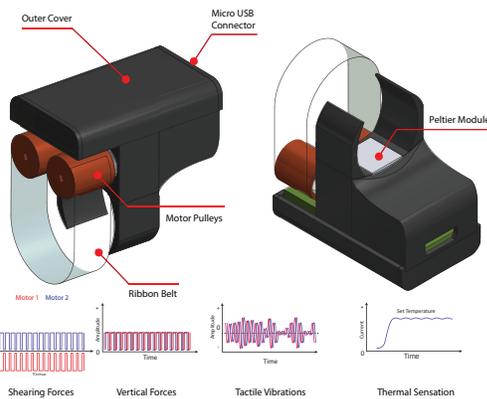


Figure 3: System Description

As shown in Figure 3, the haptic module consists of two Miniature DC motors and a belt attached to the motors to create vertical and shearing forces in a similar manner to the Gravity Grabber[Minamizawa et al. 2007] device. A peltier module is placed underneath the motors that touches the user's nail and the skin above. The above apparatus can render vertical forces by pulling the belt, shearing forces by sliding the belt, textures by converting the textural audio signals into DC motor PWM[Yem et al. 2016] and thermal sensations with the peltier module.

3 USER EXPERIENCE

The integrated haptic device can be used in many virtual and augmented reality applications. We developed Altered Texture applications as shown in Figure 1(b-c) where the user can see an augmented texture projected onto a transparent cube using HoloLens. The user

can feel the softness or hardness with the aid of vertical and shearing forces when he tries to grab the physical block and different textures with the aid of high frequency vibrations on the same transparent cube.

Temperature could be altered. As shown in Figure 1(d), when the user touches the augmented candle and ice cube, the user can feel it as hot or even a surprise cold. Altered thermal effects were something strange to the users when they tried it for first time.



Figure 4: VR applications

Several virtual reality applications have been developed as shown in Figure 4 where the user plays a Jenga game with the aid of haptic feedback. Moreover, hot and cold sensations have been packed into an augmented reality game where the user is supposed to hit the environment or the virtual objects using fireballs or iceballs. The user can switch between the selection with HoloLens gestures and can control the size of the fire/ice ball with the help of increasing heat/cold sensation.

4 CONCLUSION AND FUTURE WORK

We developed a fingertip haptic display with integrated force, tactile and thermal feedback in a miniature form-factor such that it can be worn easily and used with augmented reality applications without affecting the existing tracking technologies. By using the force display, we proposed the concept of "Altered Touch", that can be used to alter the haptic properties of real objects by rendering projected visual, and haptic feedbacks. The system has its limitations such that the projected virtual objects cannot be tracked in free space. Furthermore the gesture tracking is very limited and thus the target applications become limited. This haptic display could be expanded to design a haptic glove that can alter the haptics in reality, and we could feel the touch as we would always want to.

5 ACKNOWLEDGEMENT

This work is supported by JST ACCEL Embodied Media Project Grant Number JPMJAC1404.

REFERENCES

- Charith Lasantha Fernando, Masahiro Furukawa, Tadatashi Kurogi, Kyo Hirota, Sho Kamuro, Katsunari Sato, Kouta Minamizawa, and Susumu Tachi. 2012. TELESAR V: TELExistence surrogate anthropomorphic robot. In *ACM SIGGRAPH 2012 Emerging Technologies*. ACM, 23.
- Kouta Minamizawa, Souichiro Fukamachi, Hiroyuki Kajimoto, Naoki Kawakami, and Susumu Tachi. 2007. Gravity grabber: wearable haptic display to present virtual mass sensation. In *ACM SIGGRAPH 2007 emerging technologies*. ACM, 8.
- Takuji Narumi, Takashi Kajinami, Tomohiro Tanikawa, and Michitaka Hirose. 2010. Meta cookie. In *ACM SIGGRAPH 2010 Posters*. ACM, 143.
- Alvaro G Perez, Daniel Lobo, Francesco Chinello, Gabriel Cirio, Monica Malvezzi, Jose San Martin, Domenico Prattichizzo, and Miguel A Otaduy. 2016. Optimization-Based Wearable Tactile Rendering. *IEEE Transactions on Haptics* (2016).
- Vibol Yem, Ryuta Okazaki, and Hiroyuki Kajimoto. 2016. Vibrotactile and pseudo force presentation using motor rotational acceleration. In *Haptics Symposium (HAPTICS), 2016 IEEE*. IEEE, 47-51.