

Automatic Generation of 3D Typography

Suzi Kim Sunghee Choi
Korea Advanced Institute of Science and Technology

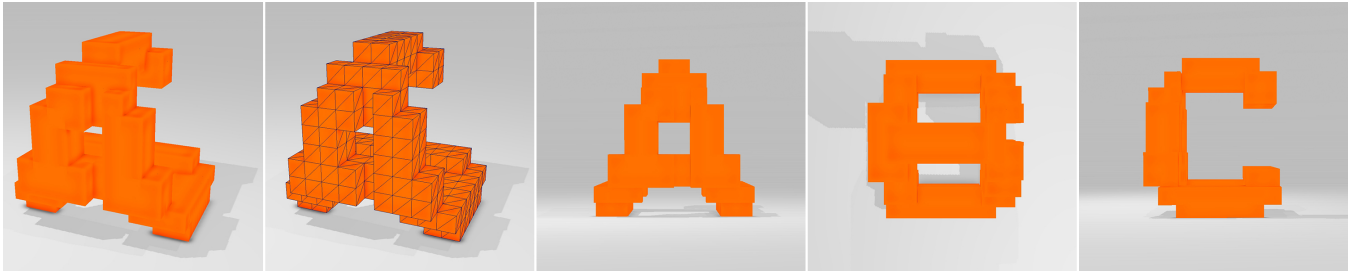


Figure 1: Our system automatically creates a 3D typography model for given letters. The model shows different letter depending on the view direction. The figure is an example of the 3D typography model from letters 'A' (front view), 'B' (top view), and 'C' (side view).

Keywords: typography, 3D typography, 3D CAPTCHA, 3D text model

Concepts: •Computing methodologies → Shape modeling;

1 Introduction

Three-dimensional typography (3D typography) refers to the arrangement of text in three-dimensional space. It injects vitality into the letters, thereby giving the viewer a strong impression that is hard to forget. These days, 3D typography plays an important role in daily life beyond the artistic design. It is easy to observe the 3D typography used in the 3D virtual space such as movie or games. Also it is used frequently in signboard or furniture design. Despite its noticeable strength, most of the 3D typography is generated by just a simple extrusion of flat 2D typography. Comparing with 2D typography, 3D typography is more difficult to generate in short time due to its high complexity.

To the best of our knowledge, there has been no attempt to generate a 3D typography automatically. This paper introduces a method to design a 3D typography from given input letters automatically. We focus on the optical illusion technique to generate an object which shows different texts depending on the viewer's perspective. We suggest a method satisfying two conditions: 1) it must create a 3D model which provides different contents in accordance with different perspectives and 2) the 3D model must have orthogonal projections which are identical with the corresponding shape of letters. Afterward, this paper applies the 3D typography to 3D CAPTCHA.

2 Our Approach

We use a molecular construction strategy [Miller 1996] to generate a 3D typography. Molecular construction is a technique to build a whole typography from smaller units. We divide the cube into

smaller blocks, each of which is a smaller unit cube and remove some blocks to express letters.

First of all, we created Latin alphabet patterns which will be carved to the cube. Any font can be tailored to pixel-based pattern. After preparing images which contain each letter from A to Z using a particular font, $n \times n$ grid is drawn on the images, where n is the edge length of a cube. If the cell is covered over 50% by the letter, we mark the cell as pattern and repeat this process for all the cells in the grid.

Pattern sculpting is a basic operation to sculpt the pattern on a face of the cube. As a cube consists of many blocks, a pattern can be sculpted on a cube by removing of blocks which obstruct the recognition of a pattern. To sculpt multiple letters on a single cube, each extrusion of letter is merged to one model from different directions one by one. Since the previous letter could be spoiled by later letter, verification is necessary to check whether current carving might spoil the shapes of previous letters or not. If the synthesis fails in every combination of patterns with rotating or flipping of patterns, we regard the combination of letters as impossible to synthesize. To increase the success rate of a 3D typography generation for arbitrary combinations, the original patterns are replaced with candidate patterns which compromise the legibility but succeed in synthesis of 3D typography.

CAPTCHA [Von Ahn et al. 2003] is a test that distinguishes between human and computer. The most commonly used CAPTCHA is based on the humans' ability to read distorted 2D letters. However, through the development of machine learning, computer can recognize the alphabet quickly. For this reason, 3D CAPTCHA [Imsamai and Phimoltares 2010; Susilo et al. 2010] was designed to minimize the legibility. However, previous studies hardly represent the complete 3D CAPTCHA because they just enumerate the 3D objects extruded from 2D text with depth on a single direction. We suggest a new 3D CAPTCHA which allows human to recognize the text at some certain angles from 360 degrees of freedom.

To extend 3D typography to 3D CAPTCHA, we build an undirected multigraph $G = (V, E)$ whose vertex set V is the set of all blocks in the cube and edge set E represents the connection between vertices. Multiple edges are used to represent the physical connection between blocks (C-edge) and the connectivity of blocks in terms of projection direction (X-edge, y-edge, and Z-edge). One vertex can have a maximum of six C-edges because a block has six faces. X-edge, Y-edge and Z-edge represent the connectivity of blocks in

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s). © 2016 Copyright held by the owner/author(s). SIGGRAPH '16, July 24-28, 2016, Anaheim, CA, ISBN: 978-1-4503-4371-8/16/07 DOI: <http://dx.doi.org/10.1145/2945078.2945099>

